


ZAZA2 PAIG

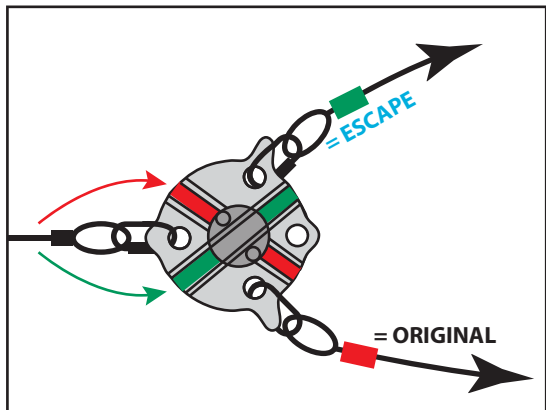

ADVANTAGES

- Escape
- Diversion
- Overtaking


kN
CT/WLL 6kN

SAFETY CABLE STEEL
Ø 12
or 1/2"
METAL CORE

GO 10/LO
7/16
WLL:1000 Kg

EN 15567-1
EN 13411 - 1/7
STANDARDS


ALLOY

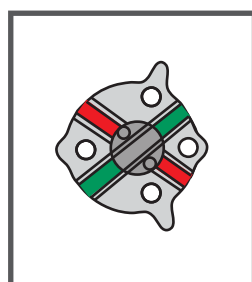

=


x 3-4
GO 10/LO
7/16
1000 Kg

NO! Zipline

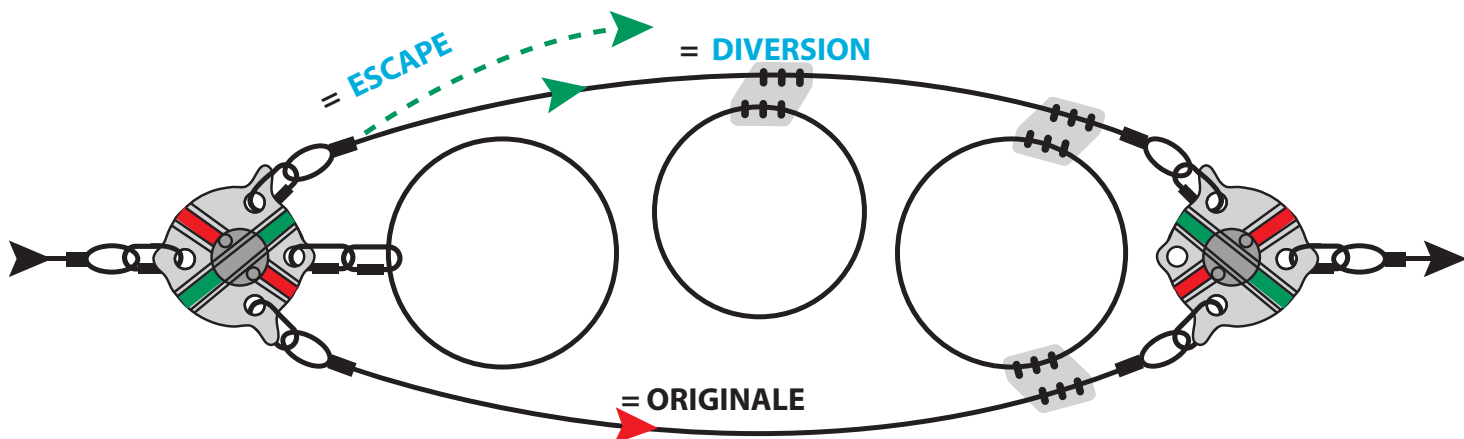


EXAMPLE of NOT CONTRACTUAL ASSEMBLY

Opération 1

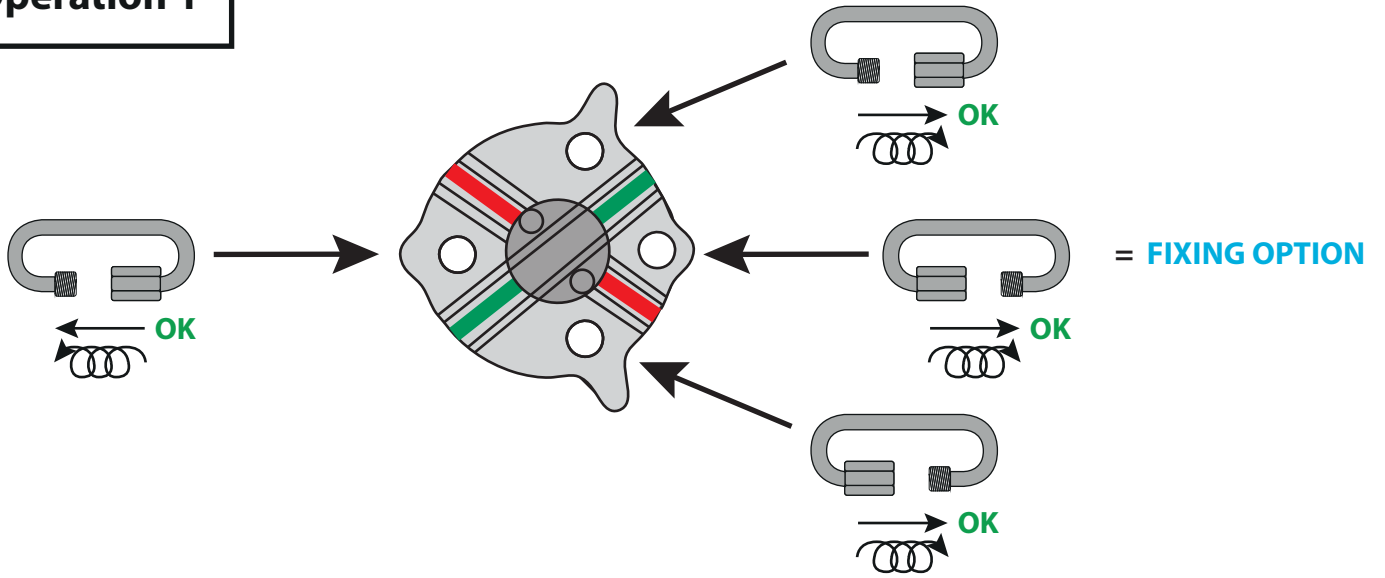

Opération 2

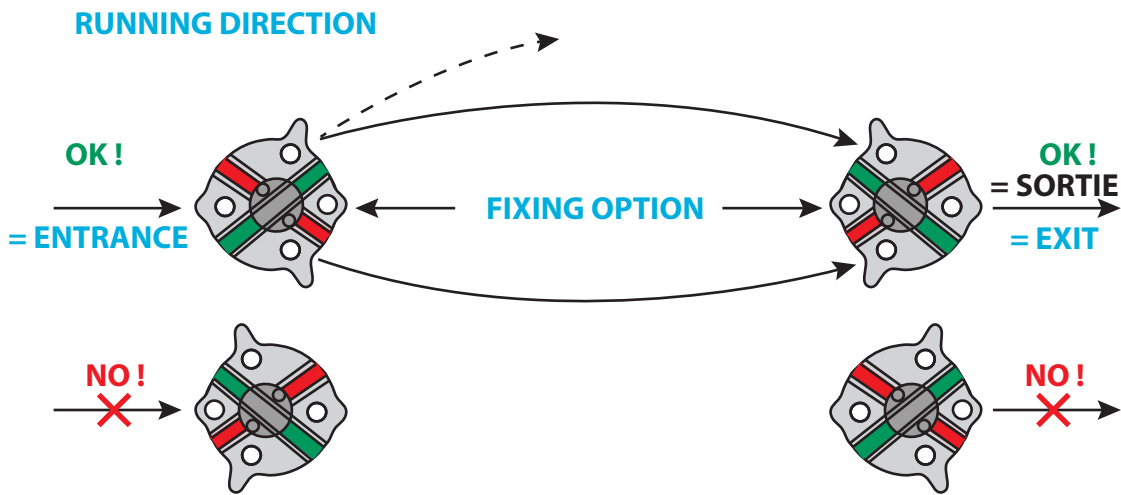

Opération 3

RECOMMANDATION OF ASSEMBLY

STANDARDS OF ASSEMBLY



EN 15567-1
EN 13411-1/7
STANDARDS - ACCT

FLEXIBLE ASSEMBLY
ENTRANCE CABLE
= EASY TO USE

FLEXIBLE ASSEMBLY ENTRANCE
CABLE = 180° ROTATION for the HOOK

